

Silent. Smart. Great at work.

Duct ACs from Vestar.



2019 RANGE

Commercial Air Conditioners

Superior Comfort

Our duct type air conditioners are designed to perform at high ambient temperatures without compromising in consistency. Vestar duct type air conditioners come with a host of other features like a Timer, Auto restart, Hydrophilic Aluminium fin and Long-term filter to help you feel comfortable without any hassles.

Advanced Technology

Engineered to perform under the most extreme weather conditions, these air conditioners are equipped with high efficiency compressors which offer unbeatable advantages while being economical, making them super cool, super sturdy machines worth every penny.

Economy

The high efficiency compressor delivers unbelievable power saving for the business user. Easy-to- install and easier to maintain, the units make great economic sense to the discerning buyer.


To know more on how our duct type air conditioners make perfect business sense, call us today.

STANDARD FEATURES

- Auto Restart Function
- Wired controller
- Long-term filter
- Hydrophilic Aluminium fin


Flexible Installation

Air intake from rear as standard and from bottom is optional. The size of the plate from bottom is the same as the flange from back, which makes it convenient to change installation style due to different decoration requirements.

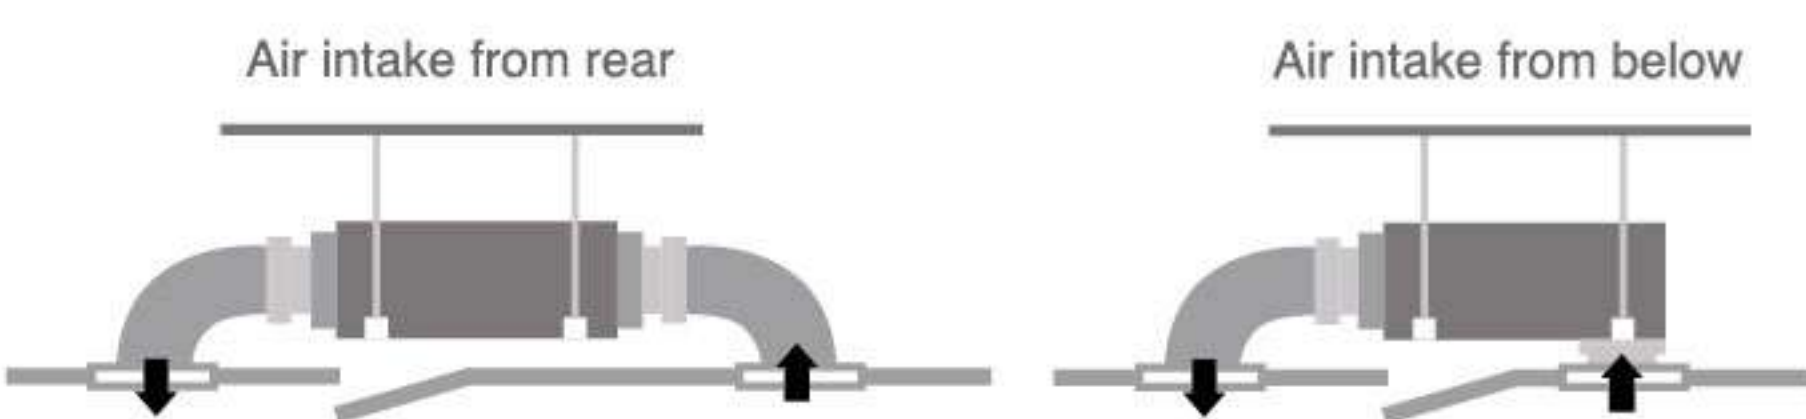

Fresh Air

Fresh air makes indoor environment healthy and comfortable

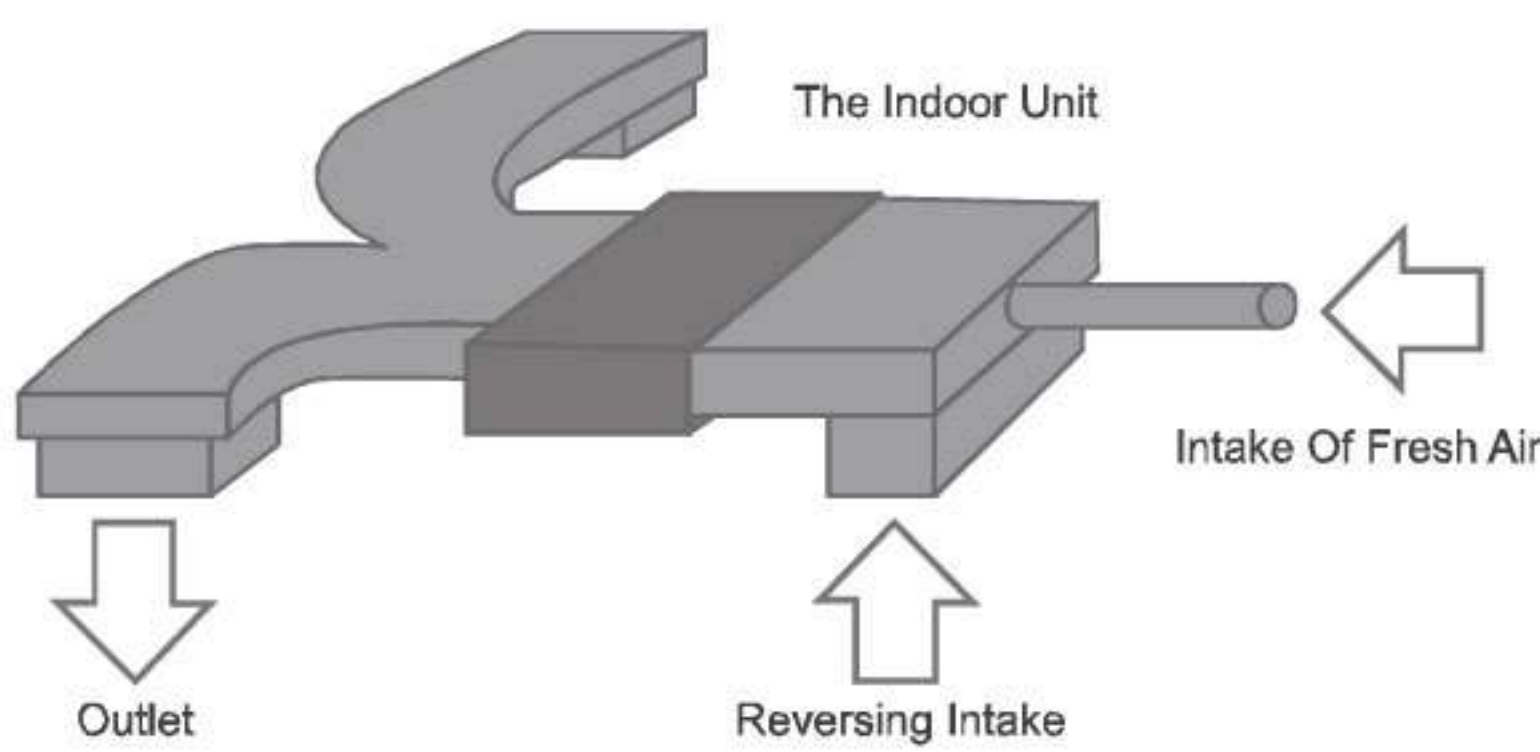

Technical Specifications

		Duct Type						
Model	Indoor		VADS18A4R1	VADS24A4R1	VADS36A4R1	VADS48A4R1	VADS60A4R1	VADS96A4R1
	Outdoor		VADO18A4R1	VADO25A4R1	VADO36A5R1	VADO48A5R1	VADO60A5R1	VADO96A5R1
Cooling Capacity		KW	5.3	7.2	10.6	14.0	17.6	28.0
		BTU/hr	18000	24000	36000	48000	60000	96000
Room Air Circulation (High)	Indoor	m3/hr	1000	1400	2000	2400	2800	5000
Power Source		v-ph-Hz	220~240V/1 Ph/50Hz			380~415V.	3ph/50 Hz	
Compressor Type			Rotary					
Indoor unit Noise level (High/Med/Low)		db(A)	44/41/35	47/44/38	50/47/41	53/50/44	53/50/44	55
Dimension (HxWxD)	Indoor	mm	290x890x785	290x890x785	290x890x785	290x1250x785	290x1250x785	460x1350x700
	Outdoor	mm	530x800x286	655x822x302	857x903x354	1366x940x368	1366x940x368	1510x1120x400
Weight (Net/Gross)	Indoor	Kg	32/37	32/40	32/42	50/56	50/56	91/111
	Outdoor	Kg	38/41	50/54	65/75	101/112	102/113	176/191
Refrigerant Type			R410a					
Connection Pipe Size (Liquid/Gas)		mm	6.35/12.7	9.52/15.88	9.52/15.88	9.52/19.05	9.52/19.05	9.52/19.05*2
Maximum Pipe Length		m	20	30	50	50	50	50
Height Difference **		m	15	15	30	30	30	20
Operating Temperature		°C	upto 49°					

For trade enquiries : cacsales@eltechappliances.com

Note : * Rated input power condition is based on the cooling Indoor temperature of 27°CDB / 19°CWB and outdoor temperature of 35°CDB / 24°CWB. ** Height difference conditions is for the outdoor unit slated up.

Eltech Appliances Private Limited,

Regd Office: ETA Star House, New No. 71, Old No. 63, 4th Floor Sterling Road, Nungambakkam, Chennai 600 034.

Corporate Office: Seethakathi Business Centre, No.684-690, 6th Floor, Anna Salai, Thousand Lights,Chennai – 600 006. Tel: +91 44 2829 3065

For any service requests/queries

Customer Care: 1860 258 3003

Email: customercare@eltechappliances.com

To know more visit our website at www.eltechappliances.com

Whatsapp no. for call registration: 6379 88 3003